

Metering valves for LHL system

S Series MU

The MU style valves are junction mounted Positive Displacement Injectors. Designed with lower operating pressure suitable for use only with LHL and the P-107 pump. 3 types are available for 4mm tail tubing connection. MU has a female hole for a compression bushing, MU-N Type have a male stem for a compression nut, and the MU-C type incorporate a push to connect fitting.




Specifications

Operating pressure	1.5MPa
Reset pressure	0.4MPa


Model

Model	Part Number	Discharge volume (ml)	L (mm)	Mark	
MU-5	205872	0.05	37.4	5	HEX12
MU-10	205873	0.1		10	
MU-20	205874	0.2	50.4	20	
MU-5N	205912	0.05	41.4	5	
MU-10N	205913	0.1		10	
MU-20N	205914	0.2	54.4	20	
MU-5C	205922	0.05	46.7	5	
MU-10C	205923	0.1		10	
MU-20C	205924	0.2	59.7	20	

Operation chart

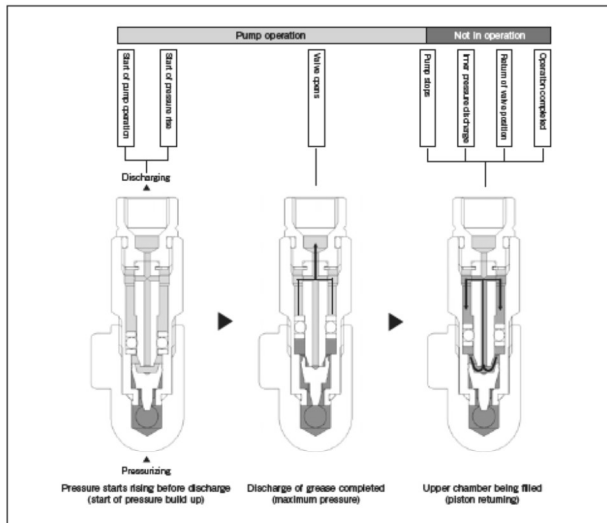

Dimensional drawing

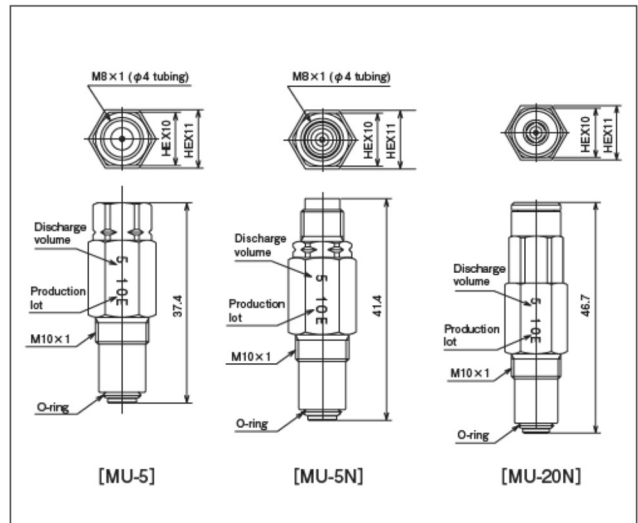

Related parts

